

RX 10/16

THE LIGHT STACKER



MONO MAST STACKER

RX is the most compact in the stackers' range, single mast, completely electric, suitable for loads up to 1.000 kg, allowing a comfortable, safe use, with low maintenance costs, thanks to robust design with easy access for maintenance. RX combines compactness and ergonomics, covering a wide range of daily applications in the "light duty" area (not for continuous use).



BASIC

The STANDARD version is equipped with starting type battery, a tiller made with metal tube and ergonomic controls. This configuration is the best value for money choice.



TILLER

Fully integrated ergonomic tiller system including finger tip throttle and fork controls, safety pushbutton, horn and turtle function. The turtle function is activated by pushing the horn with the tiller pulled up.



VERSATILITY

It's ideal to move, even horizontally, palletized goods and at the same time it can be used as an adjustable workable, reducing stress for the operator who must place goods on a shelf. Forks thickness 60 mm for an easier entrance inside pallet, while working in elevation.



EASY MAINTENANCE

Strong ABS carter/cover with storage compartments on top.
Easily removable to speed up maintenance operations.
The bottom access opening allows an immediate disassembly of motor wheel, portal and tiller without lifting the machine.



ERGONOMICS

Ergonomic tiller placed laterally to increase visibility, ensuring an optimal arrangement of components inside the motor compartment. RX 10 solves perfectly the problem of handling goods in narrow spaces and corridors.



BATTERY PACK

Starting batteries, lightweight and inexpensive, allow up to 3 hours autonomy.



Description

1.1 Manufacturer	PR INDUSTRIAL		
1.3 Drive	Electric		
1.4 Operator type	Pedestrian		
1.5 Load capacity	Q	kg	1000
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	786
1.9 Wheel base	y	mm	1165

Weights

2.1 Service weight (battery included)	kg	363
2.2 Axle load, laden rear	kg	937
2.2 Axle load, laden front	kg	426
2.3 Axle load, unladen front	kg	261
2.3 Axle load, unladen rear	kg	102

Tyres/Chassis

3.1 Tyres: front wheels			RUBBER
3.1 Tyres: stabilizers wheels - front			POLY C.
3.1 Tyres: rear wheels			POLY C.
3.2 Tyre size: Steering wheels - Width	mm		50
3.2 Tyre size: Steering wheels - Diameter	mm		186
3.3 Tyre size: Load rollers - Diameter	mm		82
3.3 Tyre size: Load rollers - Width	mm		70
3.4 Tyre size: stabilizers wheels front - Diameter	mm		125
3.4 Tyre size: stabilizers wheels front - Width	mm		45
3.5 Tyre size: rear wheels - Q.ty (X=driven)	nr		2
3.5 Tyre size: front wheels - Q.ty (X=driven)	nr		1x
3.6 Tread, front	b10	mm	505
3.7 Tread, rear	b11	mm	410

Dimensions

4.2 Height, mast lowered	h1 mm	1970
4.3 Normal free lifting	h2 mm	1510
4.4 Lift height	h3 mm	1510
4.5 Height, mast extended	h4 mm	1970
4.9 Height of tiller in drive position max	h14 mm	1310
4.9 Height of tiller in drive position min	h14 mm	915
4.15 Height, lowered	h13 mm	90
4.19 Overall length	l1 mm	1675
4.20 Length to face of forks	l2 mm	522
4.21 Overall width (front/rear)	b1/b2 mm	794
4.22 Fork dimensions - Thickness	s mm	60
4.22 Fork dimensions - Width	e mm	150
4.22 Fork dimensions - Length	l mm	1153
4.24 Fork carriage width	b3 mm	650
4.25 Forks width	b5 mm	560
4.32 Ground clearance, centre of wheelbase	m2 mm	30
4.34 Aisle width	Ast mm	2120
4.35 Turning radius	Wa mm	1344



Performance data

5.1 Travel speed laden	km/h	3.7
5.1 Travel speed unladen	km/h	4.3
5.2 Lifting speed laden	m/s	0.12
5.2 Lifting speed unladen	m/s	0.21
5.3 Lowering speed laden	m/s	0.18
5.3 Lowering speed unladen	m/s	0.18
5.8 Max gradeability laden	%	10
5.8 Max gradeability unladen	%	15
5.10 Service brake	Electric	

Electric motors

6.1 Drive motor power	kW	0.35
6.2 Lift motor power	kW	2.2
Battery Type	Type	Automotive (C20)
6.4 Battery voltage	V	24
6.4 Battery capacity, Min	Ah	70
6.4 Battery capacity, Max	Ah	70
6.5 Battery weight, Min	kg	30
6.5 Battery weight, Max	kg	30
6.6 Energy consumption according to VDI cycle	kWh/h	0.45
8.4 Sound level at driver's ear	dB(A)	63

Battery and battery charger integrated

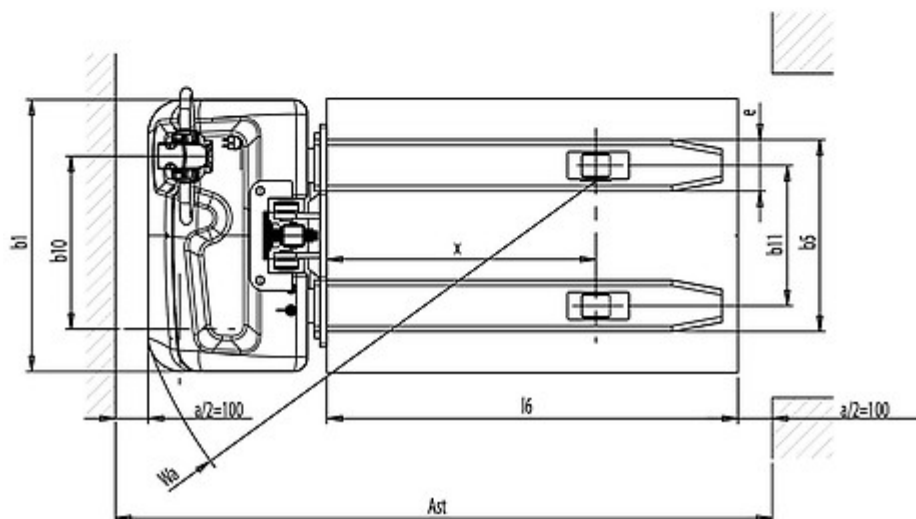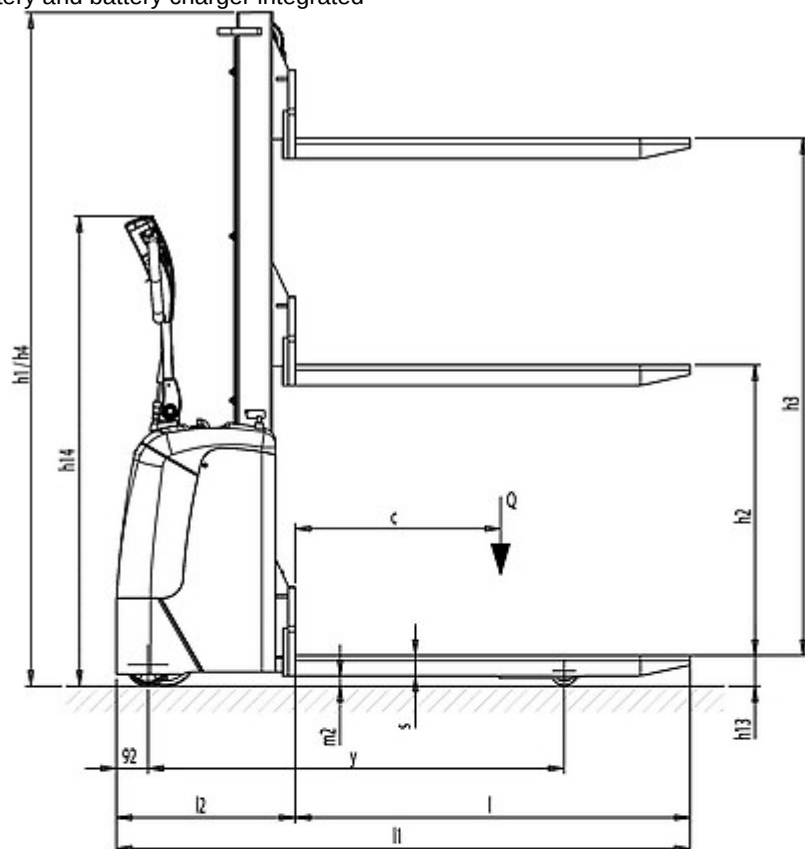

The information is aligned with the Data file at the time of download.
Printed on 26/06/2026 (ID 6376)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

